

Emergency Stop Switch

multicompPRO

**RoHS
Compliant**



Specifications

Mechanical Life	: >0.25 million operations
Electrical Life	: >0.1 million operations
Electrical Durability	: 1,000,000 cycles AC-15, 230V/1.6A 1,000,000 cycles DC-13, 24V/0.6A
Rated Insulation Voltage	: 300V
Rated Thermal Current	: 5A
Contact Resistance	: 100mΩ max. (at 1A 6-8V DC)
Insulation Resistance	: 100MΩ (at 500V DC)
Dielectric Strength	: 2000V AC 50/60 Hz for 1 min
Panel Thickness	: 0.8mm to 12mm
Degree of protection	: IP66, Type 4X Indoor use only & Type 13 IP30 (under panel)
Storage Temperature	: -40°C to +85°C
Operating Temperature	: -25°C to +55°C
Operating Humidity	: 45% to 85% RH
Wire Diameter	: 16~26 AWG, 0.2~1.5mm ²
Stripping Length	: 8mm
Torque	: 1N*m

Contact Ratings (B300/R300)

Rated Insulation Voltage		300V			
Rated Thermal Current		5A			
Operating Voltage		12V	30V	125V	250V
AC	Resistive Load (AC-12)	5A	5A	4A	2A
50/60 Hz	Inductive Load (AC-15)	5A	5A	3A	1.5A
DC	Resistive Load (DC-12)	1A	1A	0.32A	0.16A
	Inductive Load (DC-13)	1A	1A	0.22A	0.11A

Contact Block Mounting Position

Contact			Operator Position	
Configuration	Mounting	Position	Free	Push
10	1	NO		•
	2	-		
20	1	NO		•
	2	NO		•
01	1	NC	•	
	2	-		
02	1	NC	•	
	2	NC	•	
11	1	NO		•
	2	NC	•	

Note: 1. There are no → function for 1NO(10) & 2NO(20)


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO


Emergency Stop Switch

multicompPRO

Product Appearance

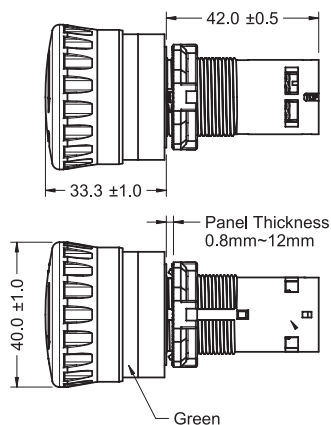

Hole Dia

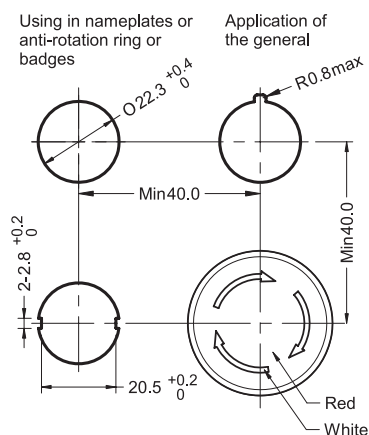

Part Number Explanation

MCC2E

-

BV

E

XX

R

Type

Pull/Turn
to Reset
Mushroom

Standard

Contact

01: 1NC

02: 2NC

10: 1NO

20: 2NO

11: 1NO+1NC

Red

Part Number Table

Description	Part Number
Non-Illuminated Emergency Stop Switch, 40mm, 1NO, Red	MCC2E-BVE10R
Non-Illuminated Emergency Stop Switch, 40mm, 1NC, Red	MCC2E-BVE01R
Non-Illuminated Emergency Stop Switch, 40mm, 2NO, Red	MCC2E-BVE20R
Non-Illuminated Emergency Stop Switch, 40mm, 2NC, Red	MCC2E-BVE02R
Non-Illuminated Emergency Stop Switch, 40mm, 1NO+1NC, Red	MCC2E-BVE11R

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO