




03 SFV

Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP68



Chassis plug acc. to IEC 61076-2-106, IP40, with threaded joint and solder terminals, for front mounting

03 SFV

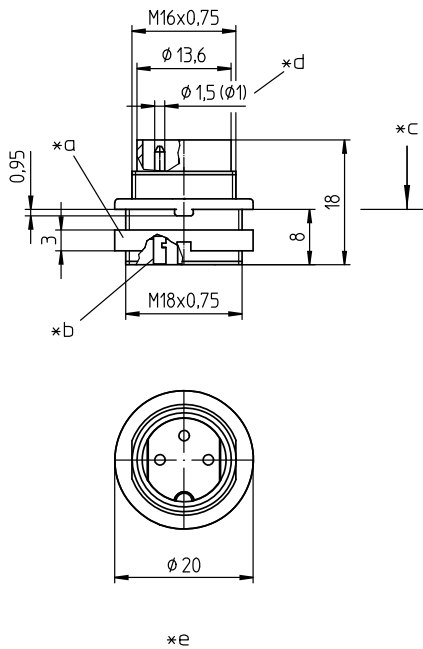

Environmental conditions

Temperature range -40 °C/+85 °C

Materials

Insulating body	PA GF, V-0 according to UL94
Contact pin	CuZn, pre-nickel and silver-plated, passivated (3-8 poles) CuZn, pre-nickel and gold-plated (12 poles)
Housing	Zn diecast, pre-copper and nickel-plated
Ring screw	CuZn, nickel-plated

Mechanical data

Tightening torque connector	1-3 Nm
Tightening torque nut	1-3 Nm
Thickness of mounting plate	1-4 mm
Protection class	IP40 ¹

¹ according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart

Connectable conductors for solder area


Section	≤ 0,75 mm ² (AWG 20) (3-8 poles) ≤ 0,25 mm ² (AWG 24) (12 poles)
---------	---

Electrical data (at T_{amb} 20 °C)


Rated current	5 A (T _{amb} 40 °C, 3-8 poles) 3 A (T _{amb} 40 °C, 12 poles)
Rated voltage	with pollution degree 1: 300 V (versions 30, 40, 50/6, 60, 70) 100 V (versions 50, 71, 80, 81) 160 V (Polbild 120) with pollution degree 2: 250 V (versions 30, 40) 32 V (versions 50, 71, 80, 81) 160 V (versions 50/6, 60, 70, 120)
Rated impulse voltage	1500 V (versions 30, 40, 50/6, 60, 70, 120) 500 V (versions 50, 71, 80, 81)
Material group	II (IEC)/I (UL) (400 ≤ CTI < 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ

03 SFV


Pin configurations, solder side view




03-a
SFV 30




04-a
SFV 40




05-b
SFV 50




05-a
SFV 50/6




06-a
SFV 60




07-a
SFV 70




07-b
SFV 71



SFV 80



08-a
SFV 81



12-a
SFV 120

- *a nut enclosed separately
- *b cup-shaped solder terminal
- *c mounting direction
- *d 12 pole version Ø 1.0 mm
- *e port in mounting plate

Associated products

Counterparts

☑ KV	☑ KV ... C	☑ KV ...-8
☑ KV ...-8 C	☑ WKV	☑ WKV ... C

Accessories

☑ 0382	☑ 0383	☑ 038399
☑ 0384	☑ 0385	☑ 038899

Harnessing equipment

☑ ZMS 20

03 SFV

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
SFV 30	3	50	100
SFV 40	4	50	100
SFV 50	5	50	100
SFV 50/6	5	50	100
SFV 60	6	50	100
SFV 70	7	50	100
SFV 71	7	50	100
SFV 80	8	50	100
SFV 81	8	50	100
SFV 120	12	50	100

Packaging:
in a cardboard box