




03 SFV

Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP68




Chassis plug acc. to IEC 61076-2-106, IP40, with threaded joint and solder terminals, for front mounting

03 SFV

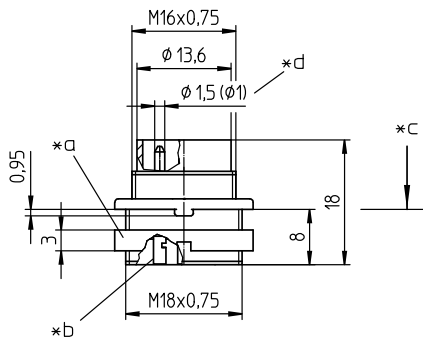

*e



Environmental conditions

Temperature range -40 °C/+85 °C

Materials

Insulating body PA GF, V-0 according to UL94
Contact pin CuZn, silver-plated and passivated (3-8 poles)
CuZn, pre-nickel and gold-plated (12 poles)
Housing Zn diecast, pre-copper and nickel-plated
Ring screw CuZn, nickel-plated

Mechanical data

Tightening torque connector 1-3 Nm
Tightening torque nut 1-3 Nm
Protection class IP40¹

¹ according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart

Connectable conductors for solder area


Section ≤ 0,75 mm² (AWG 20) (3-8 poles)
≤ 0,25 mm² (AWG 24) (12 poles)

Electrical data (at T_{amb} 20 °C)


Rated current 5 A (T_{amb} 40 °C, 3-8 poles)
3 A (T_{amb} 40 °C, 12 poles)
Rated voltage with pollution degree 1:
300 V (versions 30, 40, 50/6, 60, 70)
100 V (versions 50, 71, 80, 81)
160 V (Polbild 120)
with pollution degree 2:
250 V (versions 30, 40)
32 V (versions 50, 71, 80, 81)
160 V (versions 50/6, 60, 70, 120)
Rated impulse voltage 1500 V (versions 30, 40, 50/6, 60, 70, 120)
500 V (versions 50, 71, 80, 81)
Material group II (IEC)/I (UL) (400 ≤ CTI < 600)
Overvoltage category I
Insulation resistance > 100 MΩ

03 SFV


Pin configurations, solder side view




03-a
SFV 30




04-a
SFV 40




05-b
SFV 50




05-a
SFV 50/6




06-a
SFV 60




07-a
SFV 70




07-b
SFV 71



SFV 80



08-a
SFV 81



12-a
SFV 120

- *a nut enclosed separately
- *b cup-shaped solder terminal
- *c mounting direction
- *d 12 pole version Ø 1.0 mm
- *e port in mounting plate

Associated products

Counterparts

☑ KV	☑ KV ... C	☑ KV ...-8
☑ KV ...-8 C	☑ WKV	☑ WKV ... C

Accessories

☑ 0382	☑ 0383	☑ 038399
☑ 0384	☑ 0385	☑ 038899

Harnessing equipment

☑ ZMS 20

03 SFV

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
SFV 30	3	50	100
SFV 40	4	50	100
SFV 50	5	50	100
SFV 50/6	5	50	100
SFV 60	6	50	100
SFV 70	7	50	100
SFV 71	7	50	100
SFV 80	8	50	100
SFV 81	8	50	100
SFV 120	12	50	100

Packaging:
in a cardboard box