


Digital RCD (ELCB) Tester

multicompPRO

**RoHS
Compliant**

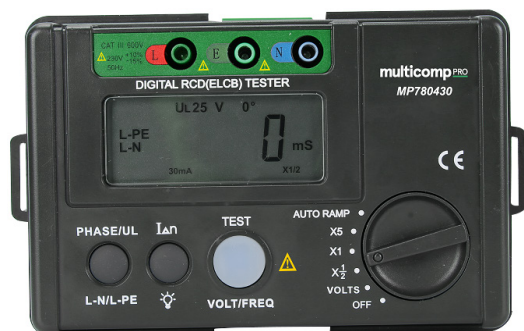

Description

This is mainly used to detect whether the RCD in the circuit can be triggered normally. It is only suitable for single-phase circuits with the supply voltage range of 195V to 253V. Its voltage measurement range is 30V to 600V, 45Hz to 65Hz.

Features

Auto Ramp	: √
Disconnect buzzer	: √
LCD backlight	: √
Data hold	: √
Power of Gear	: √
Fused	: √
Mis-operation buzzer	: √
Power off buzzer	: √
Full icon display	: √
Display Count	: 999
Low battery indication	: <7.2V
APO	: Auto power off function
Phase angle selection	: 0° and 180°
Connections check	: Simultaneously test the trip time and trip current
Over-range display	: OL
Lead sequence check	: LCD
Compliance standard	: IEC 61010-1, IEC 61010-2-030, IEC 61010-2-033, IEC 61557-1:2007; IEC 61557-6:2007, EN61326-1, EN61326-2-2

Specifications

	Range setting	Range		Accuracy
		Rated operating current	Trip time	
RCD measurement	× 1/2	10mA/20mA/30mA/100mA /300mA/500mA	2000ms	-10% to 0%
	× 1	10mA/20mA/30mA/ 100mA/300mA	1000ms	0% to 10%
		500mA	300ms	0% to 10%
	× 5	10mA/20mA/30mA	40ms	0% to 10%
	AUTO RAMP	10mA/20mA/30mA/100mA /300mA/500mA	300ms	-10% to +10%
	Trip time accuracy	±(2%+2)		
	Operating voltage (Freq.)	195V to 253V		

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Digital RCD (ELCB) Tester

multicompPRO

		Range	Accuracy
Voltage measurement	Voltage range	30V to 600V	
	Frequency	45Hz to 65Hz	
	Resolution	1V	
	Accuracy	±(3%+3)	

General Characteristics

Power	: 1.5V Battery (LR6) × 6
Display	: 71mm × 34mm
Colour	: Green and Grey
Net Weight	: 400g
Dimensions	: 160mm × 100mm × 71mm
Warranty	: 03 years

Accessories	Qty.	Note
Operating Manual	1 piece	-
Test Leads	1 pair	Leads length: 900mm, Rod length: 101mm; Tip length: 16.5mm Safety level: CAT I 1000V/CAT II 600V 10A
BS test line-3 terminals test lead	1 piece	BS Test Line(UL1803 red, green and blue wire, 34 core each)
FR test line-3 terminals test lead		FR Test Line(UL1803 red, green and blue wire, 34 core each)
Battery	6 pieces	1.5V AA, Replaceable

Part Number Table

Description	Part Number
Digital RCD (ELCB) Tester, 30V to 600V, 45Hz to 65Hz	MP780430

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO